



ACS Material Equipment Series

High-Voltage Low-Frequency Digital Plasma Power Supply

(CTP-2000KL)

- | | |
|------|------------------------|
| I. | Product Overview |
| II. | Product Components |
| III. | Product Specifications |

Contact Information:

ACS Material, LLC

Address: 959 E Walnut St., Suite 100

Pasadena, CA 91106, USA

Phone: (866) 227-0656

Fax: (781) 518-0284

E-Mail: contact@acsmaterial.com

Revision: 022825

I. Product Overview

Main Unit



Photo of a CTP-2000KL Equipment

High-Voltage Low-Frequency Digital Plasma Power Supply is a DBD (Dielectric Barrier Discharge) treatment device, designed to support various types of DBD discharge electrodes. The high-voltage electrode of the DBD electrode to be used should be connected to the high-voltage interface of this equipment, while the low-voltage electrode should be connected to the low-voltage interface. After turning on the power via the circuit breaker, the voltage, current, power, frequency, and other parameters can be adjusted via the touchscreen to generate an ionized layer in the electrode. The external interface allows for voltage waveform monitoring, instantaneous current detection, and integrated current detection.

II. Product Components

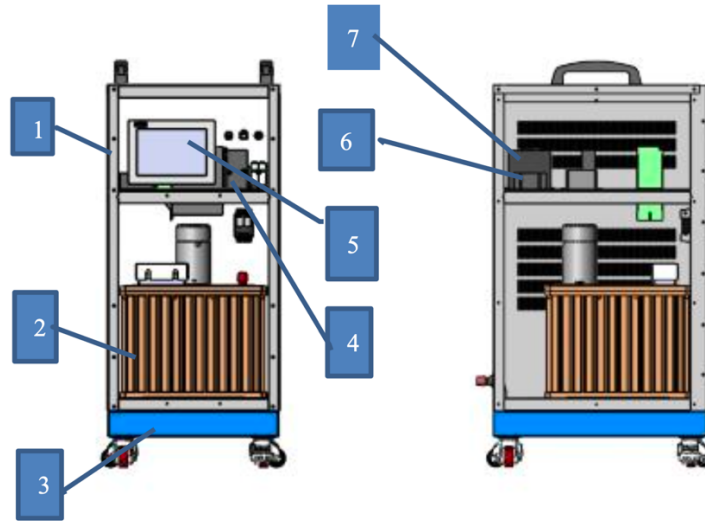


Figure 1. CTP-2000KL Equipment Structure

Overview of External Structure and Functions (Figure 1.)

1. **Chassis:** Provides structural support for the main unit.
2. **Transformer:** Supplies high-voltage current.
3. **Base:** Allows for easy movement of the equipment.
4. **Frequency Converter:** Adjusts the current frequency.
5. **Touchscreen:** Enables input and control of various parameters.
6. **Programmable Controller:** Controls digital and analog signals.
7. **Other Electrical Components:** Perform monitoring, detection, and additional functions.

III. Product Specifications

| | |
|--------------|--|
| Product Name | High-Voltage Low-Frequency Digital Plasma Power Supply |
| SKU# | EPC2KLD1 |
| Power Supply | AC220V ($\pm 10\%$) |

| | |
|----------------------------|--|
| Power Consumption | 0-500W |
| Center Frequency | Approximately 50Hz |
| Adjustable Frequency Range | 50-200Hz |
| Output Voltage (Vpp) | 0-55kV |
| Power Detection Ports | (1) Output voltage detection (with an internal 1000:1 capacitive voltage divider) (2) Instantaneous current detection (3) Integrated current detection |
| Equipment Weight | 58kg |
| Platform Dimensions | 700(W) × 720(H) × 600(D) mm |
| Other Information | Supports TCP/IP Communication Includes Control and Alarm Ports |

Disclaimer: ACS Material, LLC believes that the information in this Technical Data Sheet is accurate and represents the best and most current information available to us. ACS Material makes no representations or warranties either express or implied, regarding the suitability of the material for any purpose or the accuracy of the information contained within this document. Accordingly, ACS Material will not be responsible for damages resulting from use of or reliance upon this information.