



Technical Data Sheet

ACS Material 60% Platinum-cobalt on Carbon Catalyst (50% PtCo/C)

[1 – Preparation Method](#)

[2 – Characterizations](#)

[3 – Applications](#)

Contact Information:

ACS Material, LLC.

Address: 959 E Walnut St., Suite 100,

Pasadena, CA 91106, USA

Phone: (866)-227-0656

Fax: (781)-518-0284

E-Mail: contact@acsmaterial.com

Revision: 011321


1. Preparation Method

Low-temperature wet reduction.

2. Characterizations

Products	50% PtCo/C
Components	50% Pt; 15% Co; 35% C
Appearance	Black Powder
Catalyst support	High Surface Carbon
Mass Activity (A/mg)	0.273
ECSA (m²/g)	80
Catalyst Durability in MEA	Cycles of 0.6-0.95V while voltage loss < 30 mV at 1.5 A/cm ² and ECSA loss < 40% (>30000 cycles)
Particle Size of Load (nm)	4.5
Feature	High active

This product may contain 1% impurities whose main components are Cl and B.

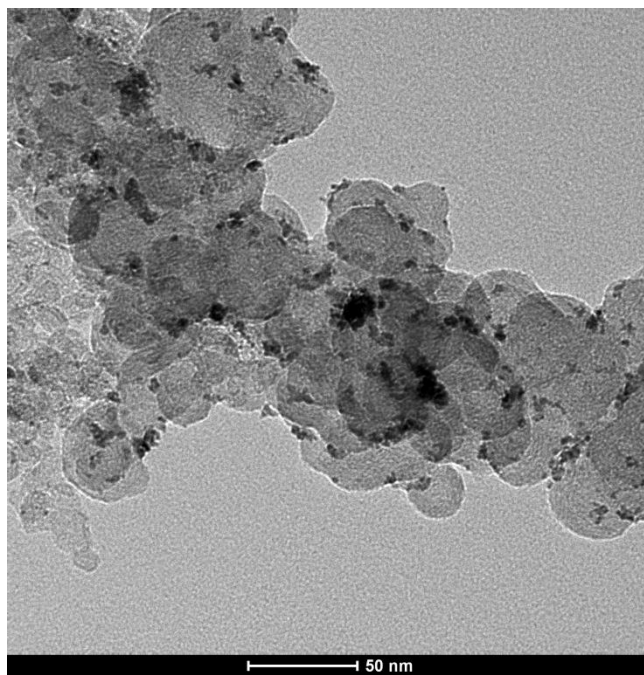

Typical TEM Image of ACS Material 50% PtCo/C

3. Applications

- 1) Fuel cell
- 2) Chemical reaction with oxygen
- 3) Organic Synthesis

Disclaimer: ACS Material, LLC believes that the information in this Technical Data Sheet is accurate and represents the best and most current information available to us. ACS Material makes no representations or warranties either express or implied, regarding the suitability of the material for any purpose or the accuracy of the information contained within this document. Accordingly, ACS Material will not be responsible for damages resulting from use of or reliance upon this information.