



Technical Data Sheet

ACS Material Graphene Oxide Film – Super Paper

Table of Contents

[1 – Preparation Method](#)

[2 – Characterizations](#)

[3 – Application Fields](#)

Contact Information:

Manufacturer: ACS Material, LLC.
Address: 959 E Walnut St., Suite 100
Pasadena, CA 91106, USA
Phone: (866)-227-0656
Fax: (781)-518-0284
E-Mail: contact@acsmaterial.com
Revision: 0721717

1. Preparation Method


Modified Hummer's Method, Direct Flow

2. Characterizations


Color:	Yellow or Brown
Size:	40 mm
Thickness:	20 μm
Electrical Conductivity:	Non-conductive, 8×10^{-2} S/m
Tensile modulus:	> 20 GPa
Solubility:	Water soluble



Photo of ACS Material Graphene Oxide Film – Super Paper

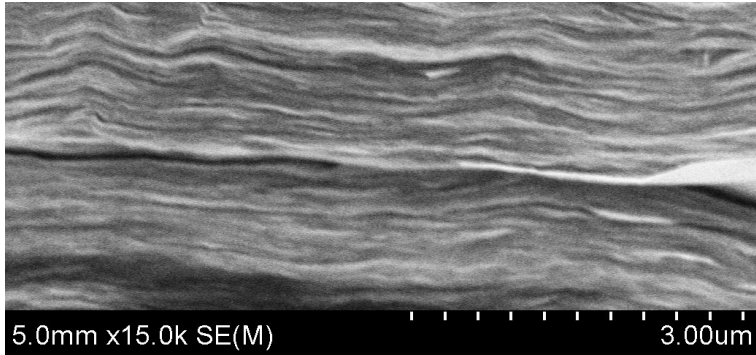

Typical SEM Image of ACS Material Graphene Oxide Film – Super Paper

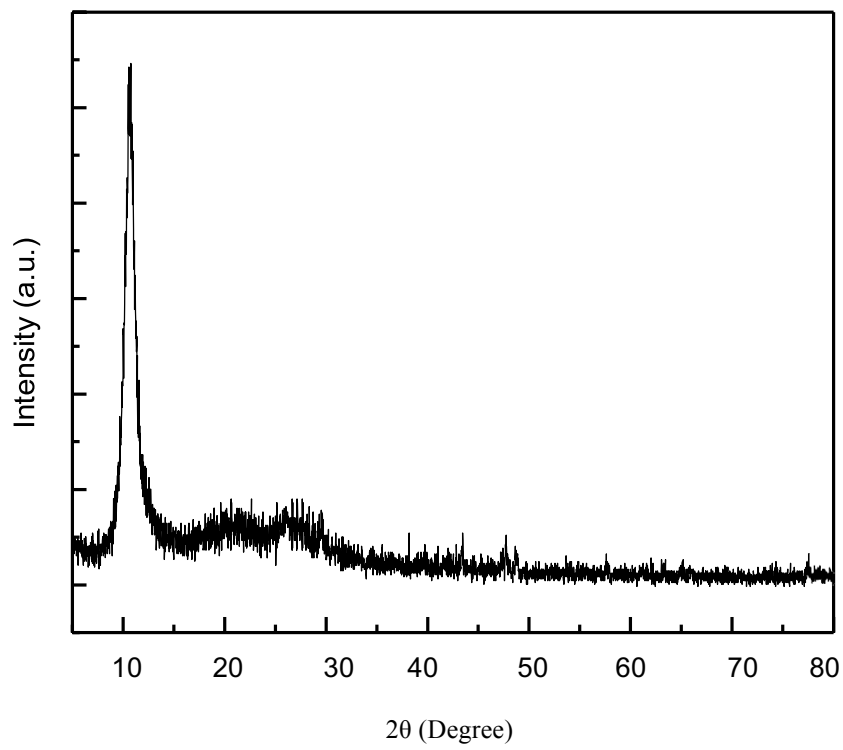

XRD Analysis of ACS Material Graphene Oxide Film – Super Paper



Packaging Image of ACS Material Graphene Oxide Film – Super Paper

3. Application Fields

- 1) Preparation of graphene
- 2) Solar energy
- 3) Graphene semiconductor chips
- 4) Conductive graphene film
- 5) Graphene computer memory
- 6) Biomaterials
- 7) Transparent conductive coatings

Disclaimer: ACS Material, LLC believes that the information in this Technical Data Sheet is accurate and represents the best and most current information available to us. ACS Material makes no representations or warranties either express or implied, regarding the suitability of the material for any purpose or the accuracy of the information contained within this document. Accordingly, ACS Material will not be responsible for damages resulting from use of or reliance upon this information.